


B-RAC

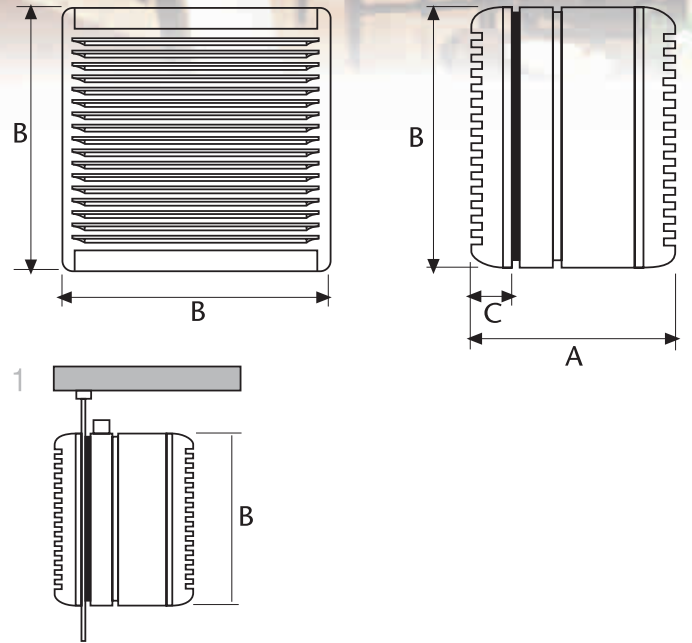

B, B-RAC

B, B-RAC Series are ideal for mid and large-scale plants. Ideal ventilation for air-conditioned environments, with its fan motor of 5 speed stages, which can be operated in both directions.

Fan Body and Propeller

Fan's body and fan blades are produced of ABS plastic, In accordance with the standards of EN 60335-2-80, Low Noise Level

Motor

Top quality manufacturing by CNC machines of high technology without human touch, Circuit breaker equipped with thermal thermic and actuated in case of overheating and resistance

Fields of Use:

To discharge the dirty air out of the social indoor areas such as restaurants, cafes, bars etc. To discharge the unwanted odors and smokes out of the houses, To discharge the moist and humid air out of the bathrooms and toilets.

	A	B	C
B-23	190	340	40
B-23/RA	190	340	40
B-30	230	420	40
B-30/RA	230	420	40

Important Information:

Product data and technical values may vary according to the operation location and conditions. All of the data given herein have been measured according to standards of TSE and EC norms. Noise level measurements have been taken at a distance of 1,5 m from the related product. The recommended lifespan is 10 years. All of our products are certified with the guaranty certificate approved by the Ministry of Industry. Guaranty period is 2 years.

MODEL	Volt (V)	r.p.m.	W	MAX.		dB (A)	Weight (kg)	Package Pcs.
				m ³ /h	mm H ₂ O			
B-23	230 V ~ 50 Hz.	1350	45	825/530	8	49	5,19	1
B-30	230 V ~ 50 Hz.	1260	90	1900/700	8	51	7,45	1
B-23 RAC	230 V ~ 50 Hz.	1350	45	825/530	8	49	5,19	1
B-30 RAC	230 V ~ 50 Hz.	1260	90	1900/700	8	51	7,45	1

Domestic Fans