



B-10 PLUS



B-10 , B12 , B 15 PLUS

Mountable to the walls, ceiling and window,
(Accessory with crystal glass kit)

Motor

Top quality manufacturing by CNC machines of high technology without human touch, Circuit breaker equipped with thermal thermic and actuated in case of overheating and resistance, Monophase fan motor of 230-240 V / 50 Hz,

Fan Body and Propeller


Fan's body and fan blades are produced of ABS plastic,
In accordance with the standards of EN 60335-2-80,
Low Noise Level

Important Information:

Product data and technical values may vary according to the operation location and conditions. All of the data given herein have been measured according to standards of TSE and EC norms Noise level measurements have been taken at a distance of 1,5 m from the related product. The recommended lifespan is 10 years. All of our products are certified with the guaranty certificate approved by the Ministry of Industry. Guaranty period is 2 years.

Fields of Use:

To discharge the moist and humid air out of the bathrooms,
To discharge the air out of the environment, where the air is dirty,
To discharge the unwanted odors and smokes out of the houses.

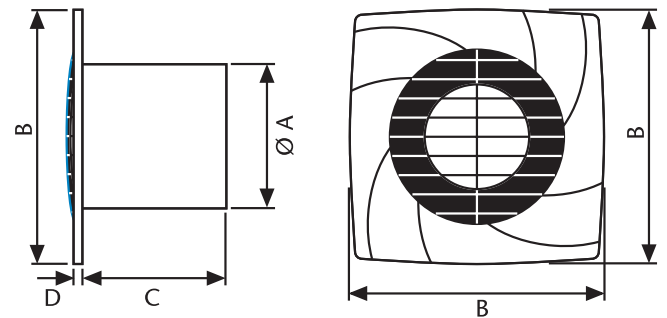

| | ØA | B | C | D |
|------------------|-----|-----|-----|----|
| B-10 PLUS | 98 | 140 | 85 | 10 |
| B-12 PLUS | 118 | 170 | 100 | 13 |
| B-15 PLUS | 148 | 190 | 112 | 15 |



In combination with light,
fan switches on



Timer



Hygro

| MODEL | Volt (V) | r.p.m. | W | MAX. | | dB (A) | Weight (kg) | Package Pcs. |
|------------------|----------------|--------|----|-------------------|---------------------|--------|-------------|--------------|
| | | | | m ³ /h | mm H ₂ O | | | |
| B-10 PLUS | 230 V ~ 50 Hz. | 2500 | 15 | 98 | 3 | 41 | 0,6 | 6 |
| B-12 PLUS | 230 V ~ 50 Hz. | 2450 | 20 | 190 | 5 | 43 | 0,85 | 6 |
| B-15 PLUS | 230 V ~ 50 Hz. | 2100 | 25 | 320 | 8 | 43 | 0,95 | 6 |

Domestic Fans

www.dundar.net

