

X-MART



X-MART - X-MART MATIC

For easy cleaning, front panel can be disassembled without screws.
Special easy assembling system without screws.
Superb silent operation and indicative operation lamp.
Aerodynamic structure designed to provide advanced air-flow.

Fan Body and Propeller

Fan's body and fan blades are produced of ABS plastic,
In accordance with the standards of EN 60335-2-80,
Low Noise Level

Motor


Top quality manufacturing by CNC machines of high technology
without human touch, Circuit breaker equipped with thermal thermic
and actuated in case of overheating and resistance,

Fields of Use:

To discharge the moist and humid air out of the bathrooms,
To discharge the air out of the environment, where the air is dirty,
To discharge the unwanted odors and smokes out of the houses.

Important Information:

Product data and technical values may vary according to the operation
location and conditions. All of the data given herein have been measured
according to standards of TSE and EC norms Noise level measurements
have been taken at a distance of 1,5 m from the related product.
The recommended lifespan is 10 years. All of our products are certified with
the guaranty certificate approved by the Ministry of Industry.
Guaranty period is 2 years.

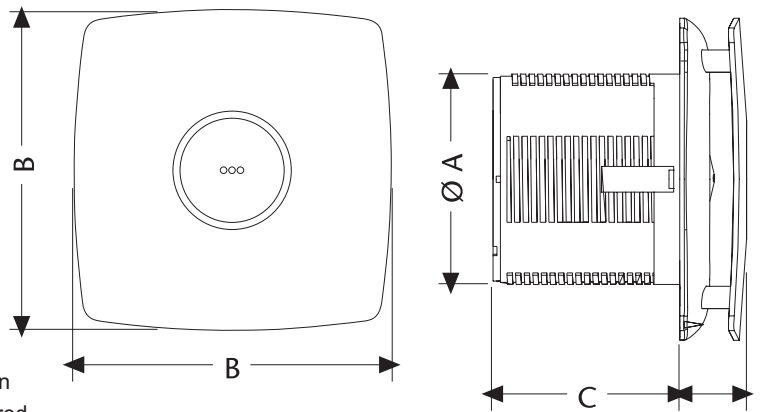

	ØA	B	C	D
X-MART 10	98	150	89,5	31
X-MART 12	118	170	103,5	32
X-MART 15	148	194	123,5	34



In combination with light,
fan switches on



Timer



Hygro

MODEL	Volt (V)	r.p.m.	W	MAX.		dB (A)	Weight (kg)	Package Pcs.
				m ³ /h	mm H ₂ O			
X-MART 10	230 V ~ 50 Hz.	2500	15	98	3	38	0,64	6
X-MART 12	230 V ~ 50 Hz.	2450	20	190	5	40	0,85	6
X-MART 15	230 V ~ 50 Hz.	2100	25	320	8	42	1,02	6

Domestic Fans